



Machining & Welding  
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

**Lifting Beams**  
**Low Headroom, Multiple Length**  
**Standard Lifting Beam**

**Low Headroom, Multiple Length Standard Lifting Beam**

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
  - Pictured with standard alloy swivel latch hooks.
  - Ideally suited for low headroom lifting applications.
  - Multiple latch hooks, eye latch hooks and shackle plates available. Please call for ordering assistance.
- Made in U.S.A.
- Machined to exacting tolerances.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.

Working Load Limit in Pounds	Model Number Headroom (in) Weight (lbs)	Outside Length (L) in Feet				
		4	6	8	10	12
1,000	<b>Part Number</b>	<b>11937</b>	<b>11959</b>	<b>11960</b>	<b>11961</b>	<b>11962</b>
	HR =	13.11	13.11	13.11	13.11	13.11
	LBS =	56	75	95	115	200
2,000	<b>Part Number</b>	<b>11983</b>	<b>11984</b>	<b>11985</b>	<b>11989</b>	<b>11990</b>
	HR =	13.11	13.11	14.11	14.11	14.11
	LBS =	56	75	167	205	240
4,000	<b>Part Number</b>	<b>12032</b>	<b>12033</b>	<b>12034</b>	<b>12039</b>	<b>12042</b>
	HR =	15.12	15.12	16.12	16.12	17.12
	LBS =	98	135	200	295	395
6,000	<b>Part Number</b>	<b>12069</b>	<b>12084</b>	<b>12087</b>	<b>12090</b>	<b>12094</b>
	HR =	15.25	16.25	17.25	18.25	18.25
	LBS =	120	180	255	380	440
10,000	<b>Part Number</b>	<b>12117</b>	<b>12123</b>	<b>12126</b>	<b>12129</b>	<b>12132</b>
	HR =	21.25	21.25	21.25	22.25	21.12
	LBS =	265	345	430	500	590
15,000	<b>Part Number</b>	<b>12162</b>	<b>12165</b>	<b>12168</b>	<b>12171</b>	<b>12174</b>
	HR =	24.27	24.28	25.28	25.28	25.28
	LBS =	265	365	450	640	870
20,000	<b>Part Number</b>	<b>12199</b>	<b>12202</b>	<b>12205</b>	<b>12208</b>	<b>12212</b>
	HR =	23.75	24.75	24.75	26.75	29.75
	LBS =	290	375	625	755	985
30,000	<b>Part Number</b>	<b>12223</b>	<b>12229</b>	<b>12232</b>	<b>12236</b>	<b>12263</b>
	HR =	29.00	29.00	34.00	34.00	40.20
	LBS =	345	555	675	1,235	1,185
40,000	<b>Part Number</b>	<b>12250</b>	<b>12254</b>	<b>12257</b>	<b>12287</b>	<b>12292</b>
	HR =	33.81	33.81	33.81	41.79	41.97
	LBS =	445	850	1,050	1,195	1,540

**Lifting Beams**  
**Low Headroom, Multiple Length**  
**Standard Lifting Beam**

Machining & Welding  
 www.MachiningAndWelding.com



Sales@MachiningAndWelding.com



RFID TRACKING



CHIP EQUIPPED

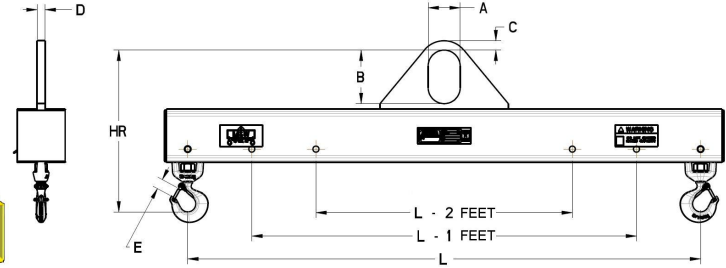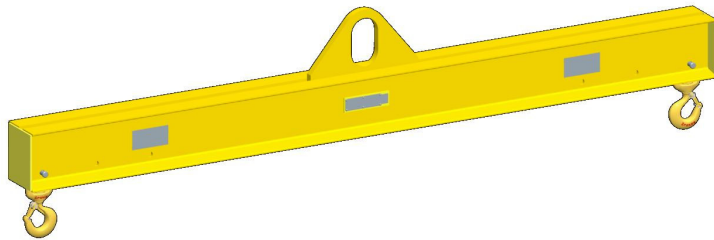

Outside Length (L) in Feet					Other Dimensions	Working Load Limit in Pounds
14	16	18	20	24		
<b>11968</b> 13.11 226	<b>11971</b> 14.11 313	<b>11974</b> 14.11 350	<b>11977</b> 14.11 390	<b>11981</b> 15.11 535	C=.875, A=3.0 B=5.0, D=.75 E=.91	1,000
<b>12017</b> 15.11 320	<b>12018</b> 15.11 365	<b>12019</b> 15.11 500	<b>12020</b> 16.11 525	<b>12024</b> 17.11 945	C=.875, A=3.0 B=5.0, D=.75 E=.91	2,000
<b>12046</b> 18.12 575	<b>12050</b> 18.12 650	<b>12055</b> 19.12 771	<b>12059</b> 20.12 1,060	<b>12063</b> 22.12 1,510	C=.875, A=3.0 B=5.0, D=.75 E=1.0	4,000
<b>12098</b> 19.25 635	<b>12102</b> 19.25 715	<b>12106</b> 20.25 990	<b>12109</b> 20.25 1,295	<b>12112</b> 22.25 1,310	C=1.25, A=3.0 B=5.0, D=1.00 E=1.00	6,000
<b>12138</b> 22.25 970	<b>12141</b> 22.25 1,095	<b>12148</b> 24.25 1,035	<b>12152</b> 24.25 1,340	<b>12155</b> 26.50 1,800	C=2.0, A=4.0 B=7.0, D=1.25 E=1.09	10,000
<b>12177</b> 27.28 1,000	<b>12180</b> 30.28 1,265	<b>12183</b> 30.28 1,405	<b>12186</b> 29.84 1,800		C=2.0, A=4.0 B=7.0, D=1.25 E=1.56	15,000
<b>12215</b> 29.75 1,595	<b>12218</b> 29.75 1,799	<b>12280</b> 35.08 1,655	<b>12284</b> 35.08 1,815		C=2.0, A=4.0 B=7.0, D=1.25 E=1.61	20,000
<b>12267</b> 40.48 1,540	<b>12270</b> 40.66 1,865	<b>12274</b> 40.84 2,250	<b>12277</b> 41.07 2,750		C=2.5, A=5.0 B=9.0, D=1.50 E=2.08	30,000
<b>12295</b> 42.15 1,850	<b>12300</b> 43.58 2,130	<b>12304</b> 43.74 2,555	<b>12307</b> 43.92 3,045		C=2.5, A=5.0 B=9.0, D=1.50 E=2.08	40,000