
CM Series 632 close radius trolley

With revolutionary advances, this shorter, more compact trolley is 50% lighter than competitive trolleys, yet every bit as tough.



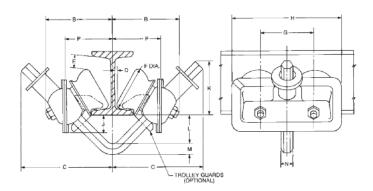

- Negotiates radius curves as tight as 7 to 10 inches
- · Made of highest quality rolled steel
- Unique double row, ball bearing wheel design for greater wear capacity
- Larger V-bars available for wider flange adjustment
- For low headroom applications
- · Bearings prepacked with lifetime lubricant
- Exclusive Dial-Fit collar quickly adapts trolley to wide range of beams and patented rails
- Dust covers shield and protect bearings
- Trolleys available for larger beams, rails or tracks; contact CM
- Cast iron trolley guards available (except for 3 ton)
- Lifetime warranty
- Made in U.S.A.

Clearance dimensions (in.)

| Rated capacity* (tons) | | | | | |
|-------------------------------|--|--------------------|--|--|--|
| 1/4 & 1/2 | 1 | 11/2 & 2 | 3 | | |
| 7 | 7 | 10 | 10 | | |
| 41/4 | 43/8 | 5 ⁵ ⁄8 | 6 ³ ⁄16 | | |
| 5 ⁷ /8 | 6 | 71/2 | 8 ¹ /16 | | |
| 3/16 | 3/16 | 3/8 | 11/16 | | |
| 13/16 | ¹³ / ₁₆ | 2 ³ ⁄16 | 41/16 | | |
| 2 ³ / ₄ | 23/4 | 31/2 | 31/2 | | |
| 3 ³ ⁄8 | 3 ³ ⁄8 | 41/2 | 41/2 | | |
| 7 | 7 | 9 | 9 | | |
| 1 ½8 | 1 ½8 | 11/2 | 1 5⁄8 | | |
| 3 ³ ⁄8 | 31/2 | 4 ³ ⁄8 | 4 ¹³ / ₁₆ | | |
| 1 ¹³ /16 | 1 5⁄8 | 2 | 2 5⁄8 | | |
| 11/16 | 7/8 | 11/8 | 1 ½8 | | |
| 7/8 | 1 | 11/4 | 1 ¹ /4 | | |
| 3 | 31/8 | 37/8 | 4 ¹⁵ ⁄16 | | |
| | 1/4 & 1/2 7 41/4 57/8 3/16 13/16 23/4 33/8 7 11/8 33/8 113/16 11/16 7/8 | Rated of 1/4 & 1/2 | Rated capacity* (tons) 1/4 & 1/2 7 7 7 10 41/4 43/8 55/8 57/8 6 71/2 3/16 3/16 3/8 13/16 13/16 23/16 23/4 23/4 31/2 33/8 33/8 41/2 7 7 9 11/8 11/8 11/8 11/8 24/8 113/16 15/8 2 11/16 7/8 11/8 11/8 7/8 1 11/4 | | |

Dimensions given are for minimum S-beam and will vary with larger beams.

*AWARNING

Overloading and improper use can result in injury.

To avoid injury:

- Do not exceed working load limit, load rating capacity
- Do not use to lift people or loads over people.
- use only alloy chain for overhead lifting.
- · Read and follow all instructions.

Specifications

| | | Adj. for standa | ard S-beams | | | | |
|------------------------|--------------|---------------------------|--|-------------------------------|-------------------------|------------------------------|----------------------------------|
| Rated capacity* (tons) | Product code | Depth of beam (in.) | Flange width (in.) | Tread diameter (in.) | Net weight (Ibs.) | Shipping weight (lbs.) | Minimum radius curve (in.) |
| 1/4-1/2 | 3222 | 4-12 | 2 ⁵ /8-5 ¹ /16 | 2 ³ /4 | 9 | 10 | 7 |
| 1 | 3224 | 4-12 | 2 ⁵ /8-5 ¹ /16 | 2 ³ / ₄ | 10 | 12 | 7 |
| 11/2-2 | 3226 | 6-15 | 3 ³ / ₈ -5 ⁵ / ₈ | 31/2 | 23 | 25 | 10 |
| 3 | 3230 | 8-18 | 4-6 ¹ / ₄ | 31/2 | 29 | 33 | 10 |

All capacities can be supplied for S-beams larger than listed and also for wide flange beams, rails or tracks with approximately equivalent flance widths