

Product data sheet

Specifications



IEC contactor, TeSys Deca, nonreversing, 115A, 75HP at 480VAC, up to 100kA SCCR, 3 phase, 3 NO, 110VAC 50/60Hz coil, open

LC1D115F7

⚠ To be discontinued

⚠ To be discontinued on: Dec 31, 2026

Product availability: Stock - Normally stocked in distribution facility

Main

Range	TeSys
Range of Product	TeSys Deca
Product or Component Type	Contactor
Device short name	LC1D
Contactor application	Resistive load Motor control
Utilisation category	AC-3 AC-3e AC-1 AC-4
Poles description	3P
[Ue] rated operational voltage	Power circuit <= 1000 V AC 25...400 Hz Power circuit <= 300 V DC
[Ie] rated operational current	200 A (at <140 °F (60 °C)) at <= 440 V AC AC-1 for power circuit 115 A (at <140 °F (60 °C)) at <= 440 V AC AC-3 for power circuit 115 A (at <140 °F (60 °C)) at <= 440 V AC AC-3e for power circuit
[Uc] control circuit voltage	110 V AC 50/60 Hz

Complementary

Motor power kW	30 kW at 220/230 V AC 50/60 Hz (AC-3) 55 kW at 380/400 V AC 50/60 Hz (AC-3) 59 kW at 415/440 V AC 50/60 Hz (AC-3) 75 kW at 500 V AC 50/60 Hz (AC-3) 80 kW at 660/690 V AC 50/60 Hz (AC-3) 65 kW at 1000 V AC 50/60 Hz (AC-3) 30 kW at 220/230 V AC 50/60 Hz (AC-3e) 55 kW at 380/400 V AC 50/60 Hz (AC-3e) 59 kW at 415/440 V AC 50/60 Hz (AC-3e) 75 kW at 500 V AC 50/60 Hz (AC-3e) 80 kW at 660/690 V AC 50/60 Hz (AC-3e) 65 kW at 1000 V AC 50/60 Hz (AC-3e) 18.5 kW at 400 V AC 50/60 Hz (AC-4)
Maximum Horse Power Rating	30 hp at 200/208 V AC 50/60 Hz for 3 phase motors 40 hp at 230/240 V AC 50/60 Hz for 3 phase motors 75 hp at 460/480 V AC 50/60 Hz for 3 phase motors 100 hp at 575/600 V AC 50/60 Hz for 3 phase motors
Compatibility code	LC1D
Pole contact composition	3 NO
Protective cover	With

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Ith] conventional free air thermal current	200 A (at 140 °F (60 °C)) for power circuit
Irms rated making capacity	1260 A at 440 V for power circuit conforming to IEC 60947 140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1
Rated breaking capacity	1100 A at 440 V for power circuit conforming to IEC 60947
[Icw] rated short-time withstand current	250 A 104 °F (40 °C) - 10 min for power circuit 550 A 104 °F (40 °C) - 1 min for power circuit 950 A 104 °F (40 °C) - 10 s for power circuit 1100 A 104 °F (40 °C) - 1 s for power circuit 100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit
Associated fuse rating	250 A gG at <= 690 V coordination type 1 for power circuit 200 A gG at <= 690 V coordination type 2 for power circuit 10 A gG for signalling circuit
Average impedance	0.6 mOhm - Ith 200 A 50 Hz for power circuit
Power dissipation per pole	24 W AC-1 7.9 W AC-3 7.9 W AC-3e
[Ui] rated insulation voltage	Power circuit 600 V CSA Power circuit 600 V UL Power circuit 1000 V IEC 60947-4-1 Signalling circuit 690 V IEC 60947-1 Signalling circuit 600 V CSA Signalling circuit 600 V UL
Overvoltage category	III
Pollution degree	3
[Uimp] rated impulse withstand voltage	8 kV IEC 60947
Safety reliability level	B10d = 684932 cycles contactor with nominal load EN/ISO 13849-1 B10d = 10000000 cycles contactor with mechanical load EN/ISO 13849-1
Mechanical durability	8 Mcycles
Electrical durability	0.8 Mcycles 200 A AC-1 <= 440 V 0.95 Mcycles 115 A AC-3 <= 440 V 0.95 Mcycles 115 A AC-3e <= 440 V
Control circuit type	AC 50/60 Hz standard
Coil technology	Built-in bidirectional peak limiting diode suppressor
Control circuit voltage limits	0.3...0.5 Uc (-40...158 °F (-40...70 °C)):drop-out AC 50/60 Hz 0.8...1.15 Uc (-40...131 °F (-40...55 °C)):operational AC 50/60 Hz 1...1.15 Uc (131...158 °F (55...70 °C)):operational AC 50/60 Hz
Inrush power in VA	280...350 VA 60 Hz cos phi 0.8 (at 68 °F (20 °C)) 280...350 VA 50 Hz cos phi 0.8 (at 68 °F (20 °C))
Hold-in power consumption in VA	2...18 VA 60 Hz cos phi 0.3 (at 68 °F (20 °C)) 2...18 VA 50 Hz cos phi 0.3 (at 68 °F (20 °C))
Heat dissipation	3...8 W at 50/60 Hz
Operating time	6...20 ms opening 20...50 ms closing
Maximum operating rate	2400 cyc/h at 60 °C

Connections - terminals	Control circuit: screw clamp terminals 2 0.002...0.004 in ² (1...2.5 mm ²) - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 1 0.002...0.004 in ² (1...2.5 mm ²) - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 1 0.002...0.004 in ² (1...2.5 mm ²) - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 2 0.002...0.004 in ² (1...2.5 mm ²) - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 1 0.002...0.004 in ² (1...2.5 mm ²) - cable stiffness: solid without cable end Control circuit: screw clamp terminals 2 0.002...0.004 in ² (1...2.5 mm ²) - cable stiffness: solid without cable end Power circuit: connector 1 0.02...0.2 in ² (10...120 mm ²) - cable stiffness: flexible without cable end Power circuit: connector 2 0.02...0.08 in ² (10...50 mm ²) - cable stiffness: flexible without cable end Power circuit: connector 1 0.02...0.2 in ² (10...120 mm ²) - cable stiffness: flexible with cable end Power circuit: connector 2 0.02...0.08 in ² (10...50 mm ²) - cable stiffness: flexible with cable end Power circuit: connector 1 0.02...0.2 in ² (10...120 mm ²) - cable stiffness: solid without cable end Power circuit: connector 2 0.02...0.08 in ² (10...50 mm ²) - cable stiffness: solid without cable end
Tightening torque	Control circuit 10.6 lbf.in (1.2 N.m) screw clamp terminals flat Ø 6 mm Control circuit 10.6 lbf.in (1.2 N.m) screw clamp terminals Philips No 2 Power circuit 106.2 lbf.in (12 N.m) connector hexagonal 0.2 in (4 mm) Control circuit 10.6 lbf.in (1.2 N.m) screw clamp terminals pozidriv No 2
Auxiliary contact composition	1 NO + 1 NC
Auxiliary contacts type	Mechanically linked 1 NO + 1 NC IEC 60947-5-1 Mirror contact 1 NC IEC 60947-4-1
Signalling circuit frequency	25...400 Hz
Minimum switching voltage	17 V for signalling circuit
Minimum switching current	5 mA for signalling circuit
Insulation resistance	> 10 MOhm for signalling circuit
Non-overlap time	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
Mounting Support	Rail Plate

Environment

Standards	CSA C22.2 No 14 EN 60947-4-1 IEC 60947-4-1 IEC 60335-1:Clause 30.2 IEC 60335-2-40:Annex JJ UL 60335-2-40:Annex JJ UL 60947-4-1 CSA C22.2 No 60947-4-1 JIS C8201-4-1
Product Certifications	UL CSA CCC UKCA CE EAC Marine
IP degree of protection	IP20 front face IEC 60529
Protective treatment	THIEC 60068-2-30
Climatic withstand	IACS E10 exposure to damp heat IEC 60947-1 Annex Q category D exposure to damp heat
Permissible ambient air temperature around the device	-40...140 °F (-40...60 °C) 140...158 °F (60...70 °C) with derating

Operating altitude	0...9842.52 ft (0...3000 m)
Fire resistance	1562 °F (850 °C) IEC 60695-2-1
Flame retardance	V1 conforming to UL 94
Mechanical robustness	Vibrations contactor open 2 Gn, 5...300 Hz) Vibrations contactor closed 4 Gn, 5...300 Hz) Shocks contactor closed 15 Gn for 11 ms) Shocks contactor open 6 Gn for 11 ms)
Height	6.2 in (158 mm)
Width	4.7 in (120 mm)
Depth	5.4 in (136 mm)
Product Weight	5.5 lb(US) (2.5 kg)

Ordering and shipping details

Category	US1CTR121252
Discount Schedule	CTR1
GTIN	3389110377088
Returnability	Yes
Country of origin	CZ

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	7.677 in (19.500 cm)
Package 1 Width	6.890 in (17.500 cm)
Package 1 Length	8.465 in (21.500 cm)
Package weight(Lbs)	5.501 lb(US) (2.495 kg)
Unit Type of Package 2	P06
Number of Units in Package 2	27
Package 2 Height	29.528 in (75.000 cm)
Package 2 Width	23.622 in (60.000 cm)
Package 2 Length	31.496 in (80.000 cm)
Package 2 Weight	177.056 lb(US) (80.311 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	109 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	22 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.8 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.3 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	82 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	4 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
SCIP Number	A530c666-91dd-4119-8d61-f1c22a361ecb
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov
PVC free	Yes

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	54
Circularity Profile	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Dimensions

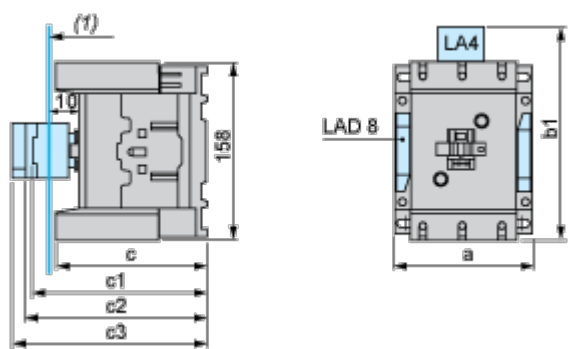

(1) Minimum electrical clearance

LC1		D115 and D150 (3-pole)
a		120
b1	with LA4 DA2	174
	with LA4 DF, DT	185
	with LA4 DM, DL	188
	with LA4 DW	188
c	without cover or add-on blocks	132
	with cover, without add-on blocks	136
c1	with LAD N or C (2 or 4 contacts)	150
c2	with LA6 DK20	155
c3	with LAD T, R, S	168
	with LAD T, R, S and sealing cover	172

Connections and Schema

Wiring

