

Product data sheet

Specifications



TeSys Deca reversing contactor , 3P(3 NO) , AC-3/AC-3e , <= 440 V 80 A , 110 V AC coil

LC2D80F7

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range	TeSys
Product name	TeSys Deca
Product or Component Type	Reversing contactor
Device short name	LC2D
Contactor application	Motor control Resistive load
Utilisation category	AC-1 AC-3 AC-3e AC-4
Device presentation	Preassembled with reversing power busbar
Poles description	3P
power pole contact composition	3 NO
[Ue] rated operational voltage	Power circuit <= 690 V AC 25...400 Hz Power circuit <= 300 V DC
[Ie] rated operational current	125 A (at <140 °F (60 °C)) at <= 440 V AC AC-1 for power circuit 80 A (at <140 °F (60 °C)) at <= 440 V AC AC-3 for power circuit 80 A (at <140 °F (60 °C)) at <= 440 V AC AC-3e for power circuit 55 A (at <140 °F (60 °C)) at <= 400 V AC AC-4 for power circuit
Motor power kW	22 kW at 220...230 V AC 50 Hz 37 kW at 380...400 V AC 50 Hz 45 kW at 415...440 V AC 50 Hz 55 kW at 500 V AC 50 Hz 45 kW at 660...690 V AC 50 Hz
Maximum Horse Power Rating	20 hp at 200/208 V AC 60 Hz for 3 phase motors 7.5 hp at 115 V AC 60 Hz for 1 phase motors 15 hp at 230/240 V AC 60 Hz for 1 phase motors 25 hp at 230/240 V AC 60 Hz for 3 phase motors 60 hp at 460/480 V AC 60 Hz for 3 phase motors 60 hp at 575/600 V AC 60 Hz for 3 phase motors
Control circuit type	AC 50/60 Hz
[Uc] control circuit voltage	110 V AC 50/60 Hz
Auxiliary contact composition	1 NO + 1 NC
[Uimp] rated impulse withstand voltage	8 kV IEC 60947
Overvoltage category	III
[Ith] conventional free air thermal current	10 A (at 140 °F (60 °C)) for signalling circuit 125 A (at 140 °F (60 °C)) for power circuit
Irms rated making capacity	140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1 1100 A at 440 V for power circuit conforming to IEC 60947
Rated breaking capacity	1100 A at 440 V for power circuit conforming to IEC 60947

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Icw] rated short-time withstand current	135 A 104 °F (40 °C) - 10 min for power circuit 320 A 104 °F (40 °C) - 1 min for power circuit 640 A 104 °F (40 °C) - 10 s for power circuit 990 A 104 °F (40 °C) - 1 s for power circuit 100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit
Associated fuse rating	10 A gG for signalling circuit conforming to IEC 60947-5-1 200 A gG at <= 690 V coordination type 1 for power circuit 160 A gG at <= 690 V coordination type 2 for power circuit
Average impedance	0.8 mOhm - lth 125 A 50 Hz for power circuit
[Ui] rated insulation voltage	Power circuit 600 V CSA Power circuit 600 V UL Signalling circuit 690 V IEC 60947-1 Signalling circuit 600 V CSA Signalling circuit 600 V UL Power circuit 1000 V IEC 60947-4-1
Electrical durability	0.8 Mcycles 125 A AC-1 <= 440 V 1.5 Mcycles 80 A AC-3 <= 440 V 1.5 Mcycles 80 A AC-3e <= 440 V
Power dissipation per pole	12.5 W AC-1 5.1 W AC-3 5.1 W AC-3e
Front cover	With
Interlocking type	Mechanical
Mounting Support	Plate Rail
Standards	CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 60335-2-40:Annex JJ
Product Certifications	UL CSA RINA GOST CCC DNV LROS (Lloyds register of shipping) GL BV UKCA
Connections - terminals	Control circuit screw clamp terminals 1 0.002...0.006 in ² (1...4 mm ²)flexible without cable end Control circuit screw clamp terminals 2 0.002...0.006 in ² (1...4 mm ²)flexible without cable end Control circuit screw clamp terminals 2 0.002...0.004 in ² (1...2.5 mm ²)flexible with cable end Control circuit screw clamp terminals 1 0.002...0.006 in ² (1...4 mm ²)solid Control circuit screw clamp terminals 2 0.002...0.006 in ² (1...4 mm ²)solid Control circuit screw clamp terminals 1 0.002...0.004 in ² (1...2.5 mm ²)flexible with cable end Power circuit connector 1 0.006...0.08 in ² (4...50 mm ²)flexible without cable end Power circuit connector 2 0.006...0.04 in ² (4...25 mm ²)flexible without cable end Power circuit connector 1 0.006...0.08 in ² (4...50 mm ²)flexible with cable end Power circuit connector 2 0.006...0.02 in ² (4...16 mm ²)flexible with cable end Power circuit connector 1 0.006...0.08 in ² (4...50 mm ²)solid Power circuit connector 2 0.006...0.04 in ² (4...25 mm ²)solid
Tightening torque	Control circuit 10.6 lbf.in (1.2 N.m) screw clamp terminals flat Ø 6 mm Control circuit 10.6 lbf.in (1.2 N.m) screw clamp terminals Philips No 2 Power circuit 106.2 lbf.in (12 N.m) connector flat Ø 6 to Ø 8 mm Power circuit 106.2 lbf.in (12 N.m) connector hexagonal 0.2 in (4 mm) Control circuit 10.6 lbf.in (1.2 N.m) screw clamp terminals pozidriv No 2
Operating time	20...35 ms closing 6...20 ms opening

Safety reliability level	B10d = 1369863 cycles contactor with nominal load EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load EN/ISO 13849-1
Mechanical durability	4 Mcycles
Maximum operating rate	3600 cyc/h 140 °F (60 °C)

Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	0.3...0.6 Uc (-40...158 °F (-40...70 °C)):drop-out AC 50/60 Hz 0.8...1.1 Uc (-40...131 °F (-40...55 °C)):operational AC 50 Hz 0.85...1.1 Uc (-40...131 °F (-40...55 °C)):operational AC 60 Hz 1...1.1 Uc (131...158 °F (55...70 °C)):operational AC 50/60 Hz
Inrush power in VA	245 VA 60 Hz cos phi 0.75 (at 68 °F (20 °C)) 245 VA 50 Hz cos phi 0.75 (at 68 °F (20 °C))
Hold-in power consumption in VA	26 VA 60 Hz cos phi 0.3 (at 68 °F (20 °C)) 26 VA 50 Hz cos phi 0.3 (at 68 °F (20 °C))
Heat dissipation	6...10 W 50/60 Hz
Auxiliary contacts type	Mechanically linked 1 NO + 1 NC IEC 60947-5-1 Mirror contact 1 NC IEC 60947-4-1
Signalling circuit frequency	25...400 Hz
Minimum switching current	5 mA for signalling circuit
Minimum switching voltage	17 V for signalling circuit
Non-overlap time	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
Insulation resistance	> 10 MOhm for signalling circuit

Environment

IP degree of protection	IP20 front face IEC 60529
Climatic withstand	IACS E10
Protective treatment	TH IEC 60068-2-30
Pollution degree	3
Ambient air temperature for operation	-40...140 °F (-40...60 °C) 140...158 °F (60...70 °C) with derating
Ambient Air Temperature for Storage	-76...176 °F (-60...80 °C)
Operating altitude	0...9842.52 ft (0...3000 m)
Fire resistance	1562 °F (850 °C) IEC 60695-2-1
Flame retardance	V1 conforming to UL 94
Mechanical robustness	Vibrations contactor open2 Gn, 5...300 Hz Shocks contactor open8 Gn for 11 ms Vibrations contactor closed3 Gn, 5...300 Hz Shocks contactor closed10 Gn for 11 ms
Height	5 in (127 mm)
Width	7.2 in (182 mm)
Depth	6.2 in (158 mm)
Product Weight	7.05 lb(US) (3.2 kg)

Ordering and shipping details

Category	US1CTR121252
----------	--------------

Discount Schedule	CTR1
GTIN	3389110457155
Returnability	No
Country of origin	CZ

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	7.5 in (19 cm)
Package 1 Width	7.5 in (19 cm)
Package 1 Length	10.04 in (25.5 cm)
Package weight(Lbs)	8.214 lb(US) (3.726 kg)
Unit Type of Package 2	S03
Number of Units in Package 2	2
Package 2 Height	11.8 in (30 cm)
Package 2 Width	11.8 in (30 cm)
Package 2 Length	15.7 in (40 cm)
Package 2 Weight	18.0008 lb(US) (8.165 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Total lifecycle Carbon footprint	193 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	22 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.4 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.6 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	162 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	8 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov
PVC free	Yes

Use Longer


Lifetime extension	
Repair	No

Use Again

Repack and remanufacture	
Recyclability potential, in %	76
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Dimensions

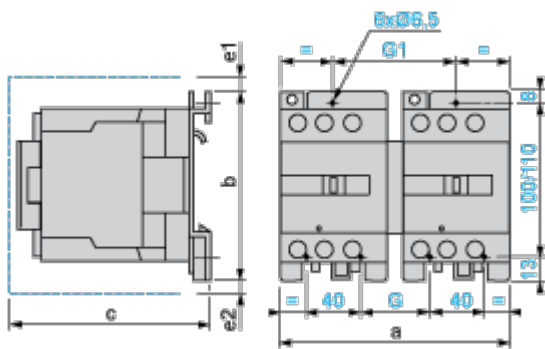

LC2 or 2 x LC1	a	b	c	e1	e2	G	G1
D80 and D95 (AC)	182	127	158	13	–	57	96
c, e1 and e2: including cabling.							

Connections and Schema

Wiring

