

PSA-INOX-Star/ PSA-VRS-Starpoint

Fall Protection Points

Product Features:

- WLL range 1 – 2 persons
- Ring body and bolt made from stainless steel
- Non-removable special bolt
- Rotatable through 360°
- PSA-INOX can be used in outdoor environments
- PSA-INOX-Star operating temperature is -40°F (-40°C) to a maximum of 536°F (280°C)
- PSA-VRS-Starpoint operating temperature is -40°F (-40°C) to a maximum of 212°F (100°C)



PSA-INOX-Star



PSA-VRS-Starpoint

PRODUCT DETAILS

Rotatable through 360°



Indicate number of carrying people

Non-detachable special bolt




Penta shape



PSA-INOX-Star/PSA-VRS-Starpoint


Metric Thread/UNC Inch Thread

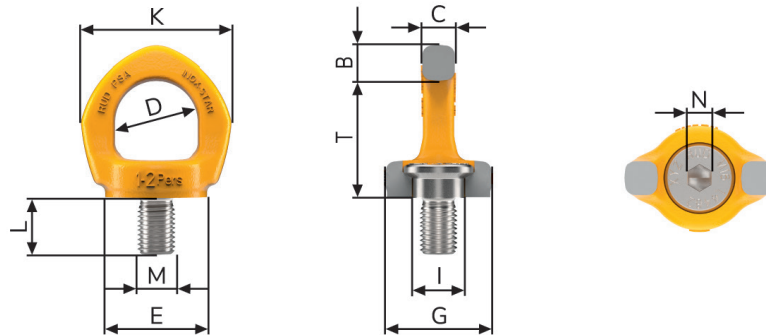

PSA-INOX-Star - Metric

Type	WLL (Persons)	Weight (kg/unit)	T (mm)	B (mm)	C (mm)	D (mm)	E (mm)	G (mm)	I (mm)	K (mm)	L (mm)	M	N (mm)	Reference Number	
PSA-INOX-Star M12	1	0.19	43	14	12	30	30	32	18	56	18	M12	8	7997097	IN STOCK
PSA-INOX-Star M16	1-2	0.31	50	15	15	35	36	40	22	65	24	M16	10	7996757	IN STOCK
PSA-INOX-Star M20	1-2	0.56	58	19	17	40	43	47	27.5	74	30	M20	12	7900921	IN STOCK
PSA-INOX-Star M12 L = 50	1	0.22	43	14	12	30	30	32	18	56	50	M12	8	7997820	
PSA-INOX-Star M16 L = 50	1-2	0.4	50	15	15	35	36	40	22	65	50	M16	10	7904107	
PSA-INOX-Star M16 L = 120	1-2	0.47	50	15	15	35	36	40	22	65	120	M16	10	7909983	
PSA-INOX-Star M20 L = 60	1-2	0.6	57	19	17	40	43	47	27.5	74	60	M20	12	7901252	

Subject to technical changes!

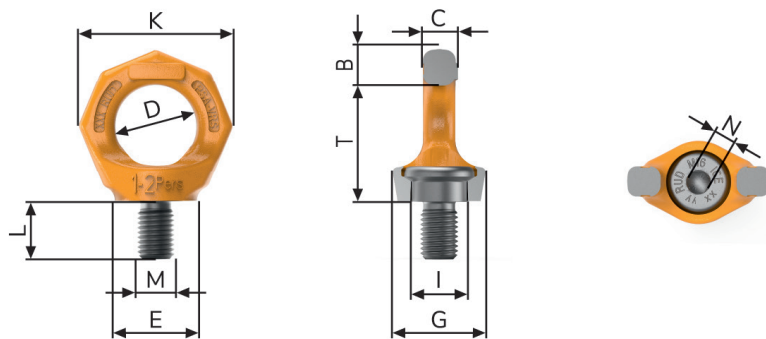

PSA-VRS-Starpoint - Metric/UNC Thread

Type	WLL (Persons)	Weight (kg/unit)	T (mm)	B (mm)	C (mm)	D (mm)	E (mm)	G (mm)	I (mm)	K (mm)	L (mm)	M	N (mm)	Model Number	
PSA-VRS-Starpoint – Metric Thread															
PSA-VRS-Starpoint M12	1	0.2	42	13	10	30	30	34	19.8	56	18	M12	8	7997100	IN STOCK
PSA-VRS-Starpoint M16	1-2	0.33	49	15	15	35	35	40	23.5	65	24	M16	10	7997854	IN STOCK
PSA-VRS-Starpoint M20	1-2	0.56	58	18	17	40	42	54	29.3	75	30	M20	12	7900920	IN STOCK
PSA-VRS-Starpoint M12 L = Vario	1	¹	42	13	10	30	30	34	19.8	56	19-150	M12	8	8600400	
PSA-VRS-Starpoint M16 L = Vario	1-2	¹	49	15	15	35	35	40	23.5	65	25-120	M16	10	8600401	
PSA-VRS-Starpoint – UNC Inch Thread															
PSA-VRS-Starpoint 1/2"-13UNC	1	0.2	42	13	10	30	30	34	19.8	56	18	1/2"-13UNC	5/16"	7997103	IN STOCK
PSA-VRS-Starpoint 5/8"-11UNC	1-2	0.32	49	15	15	35	35	40	23.5	65	24	5/8"-11UNC	3/8"	7998659	
PSA-VRS-Starpoint 3/4"-10UNC	1-2	0.56	58	18	17	40	42	54	29.3	75	30	3/4"-10UNC	1/2"	7903367	

¹Weight depends on the design.
Subject to technical changes!