

VWBG-V/VWBG

Center Pull Hoist Ring

Product Features:

- Large WLL range 0.3 t – 5 t / 6 t – 50 t
- 360° rotatable, 230° pivotable
- Large clearance between the bolt-on surface and load to prevent damage
- Clear indication of the minimum WLL for all loading directions. Higher WLL by optimized attachment or application
- Rotatable 90° to the bolt-on direction under rated WLL
- Ball bearing for shock-free and less friction when rotating and turning
- Optical markings to determine the load angle and wear occurrence

Product Description:

VWBG-V: Body separate from non-removable special RUD bolt with Corrud-DT special corrosion protection

VWBG-V: Threads are machined with body



VWBG-V



VWBG




PRODUCT DETAILS

Ball-bearing	Rotatable through 360° Extended pivoting area ~230°	Patented wear marker Ready to be discarded New
WLL X X WLL	WLL Y X >1X WLL	WLL Z Up to 2X z WLL

VWBG-V/VWBG


Metric Thread

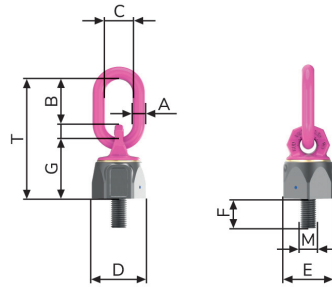

VWBG-V - Metric

Type	WLL-X (t)	WLL-Y (t)	WLL-Z (t)	Weight (kg/unit)	T (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	M	Tightening Torque (Nm)	Model Number	
VWBG-V 0.3-M8	0.3	0.4	0.6	0.18	76	8	31	29	30	27	13	36	M8	10	7103720	IN STOCK
VWBG-V 0.45-M10	0.45	0.6	0.9	0.29	78	8	31	29	33.5	30	17	38	M10	10	7103715	IN STOCK
VWBG-V 0.6-M12	0.6	0.75	1.2	0.41	107	10	49	35	42	36	21	47	M12	10	7100180	IN STOCK
VWBG-V 1-M14 (F=21)	1	1.25	2	0.63	114	13	46	38	48	41	21	56	M14	25	7910221	IN STOCK
VWBG-V 1.3-M16	1.3	1.5	2.6	0.59	114	13	46	38	48	41	25	56	M16	30	7100430	IN STOCK
VWBG-V 1.8-M18 (F=27)	1.8	2	3.6	1.18	137	13	54	35	62	55	27	67	M18	50	8600338	IN STOCK
VWBG-V 2-M20	2	2.5	4	1.42	137	13	54	35	62	55	33	67	M20	70	7100800	IN STOCK
VWBG-V 2-M22 (F=33)	2	2.5	4	1.45	137	13	54	35	62	55	33	67	M22	120	8600334	IN STOCK
VWBG-V 3.5-M24	3.5	4	7	2.63	173	18	66	40	81	70	40	88	M24	150	7100640	IN STOCK
VWBG-V 3.5-M27 (F=41)	3.5	4	7	2.65	173	18	66	40	81	70	41	88	M27	200	8600335	IN STOCK
VWBG-V 5-M30	5	6	10	5.09	221	22	90	50	99	85	50	106	M30	225	7100650	IN STOCK

Subject to technical changes!

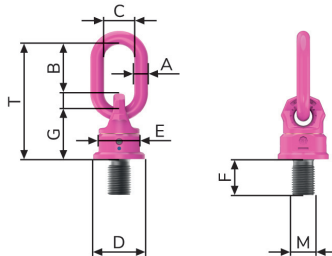


VWBG - Metric

Type	WLL-X (t)	WLL-Y (t)	WLL-Z (t)	Weight (kg/unit)	T (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	M	Tightening Torque (Nm)	Model Number	
VWBG 6(7.5)t-M33 (F=50)	6	7.5	15	4.7	208	22	86	50	90	80	50	94	M33	350	8600150	
VWBG 8(10)t-M36	8	10	15	4.7	208	22	86	50	90	80	54	94	M36	410	7999059	IN STOCK
VWBG 12(13)t-M42	12	13	17	6.1	234	26	111	65	98	85	63	95	M42	550	7999044	
VWBG 12(15)t-M45	12	15	18	6.2	234	26	111	65	98	85	67	95	M45	550	7900455	
VWBG 13(16)t-M48	13	16	18	6.8	234	26	111	65	98	85	68	95	M48	550	7999045	IN STOCK
VWBG 14(20)t-M52	14	20	25	10.6	271	32	119	70	120	95	78	120	M52	750	7901081	
VWBG 16(22)t-M56	16	22	28	10.7	271	32	119	70	120	95	84	120	M56	800	7999004	
VWBG 16(22)t-M60 (F=90)	16	22	28	11.4	271	32	119	70	120	95	90	120	M60	800	8600454	
VWBG 15(25)t-M64	16	25	28	11.4	271	32	119	70	120	95	94	120	M64	800	7999043	IN STOCK
VWBG 31.5(40)t-M72	31.5	40	50	30	338	46	130	90	170	145	108	159	M72	1200	7900097	
VWBG 35(48)t-M80	35	48	50	31	338	46	130	90	170	145	120	159	M80	1500	7900100	
VWBG 40(50)t-M90	40	50	50	35	378	46	168	110	170	145	135	159	M90	2000	7903408	
VWBG 40(50)t-M100 (F=150)	40	50	50	37	378	46	168	110	170	145	150	159	M100	2000	8600458	

Subject to technical changes!

VWBG-V/VWBG


Metric Thread In Variable Length



VWBG-V - Metric In Variable Length

Type	WLL-X (t)	WLL-Y (t)	WLL-Z (t)	Weight (kg/unit)	T (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F Vario (mm)	G (mm)	M	Tightening Torque (Nm)	Model Number
VWBG-V 0.3-M8	0.3	0.4	0.6	¹	76	8	31	29	30	27	8-102	36	M8	10	8600330
VWBG-V 0.45-M10	0.45	0.6	0.9	¹	78	8	31	29	33.5	30	10-122	38	M10	10	8600331
VWBG-V 0.6-M12	0.6	0.75	1.2	¹	107	10	49	35	42	36	12-140	47	M12	10	8600332
VWBG-V 1-M14	1	1.25	2	¹	114	13	46	38	48	41	14-160	56	M14	25	8600337
VWBG-V 1.3-M16	1.3	1.5	2.6	¹	114	13	46	38	48	41	16-225	56	M16	30	8600333
VWBG-V 1.8-M18	1.8	2	3.6	¹	137	13	54	35	62	55	18-83	67	M18	50	8600338
VWBG-V 2-M20	2	2.5	4	¹	137	13	54	35	62	55	20-223	67	M20	70	8600334
VWBG-V 2-M22	2	2.5	4	¹	137	13	54	35	62	55	22-94	67	M22	120	8600334
VWBG-V 3.5-M24	3.5	4	7	¹	173	18	66	40	81	70	24-257	88	M24	150	8600335
VWBG-V 3.5-M27	3.5	4	7	¹	173	18	66	40	81	70	27-92	88	M27	200	8600335
VWBG-V 5-M30	5	6	10	¹	221	22	90	50	99	85	30-330	106	M30	225	8600336

¹Weight depends on the design.
Subject to technical changes!




VWBG - Metric In Variable Length

Type	WLL-X (t)	WLL-Y (t)	WLL-Z (t)	Weight (kg/unit)	T (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F Vario (mm)	G (mm)	M	Tightening Torque (Nm)	Model Number
VWBG 6(7.5)t	6	7.5	15	¹	208	22	86	50	90	80	33-100	94	M33	350	8600150
VWBG 8(10)t	8	10	15	¹	208	22	86	50	90	80	36-300	94	M36-M39	410	8600451
VWBG 12(13)t	12	13	17	¹	234	26	111	65	98	85	42-300	95	M42-M45	550	8600452
VWBG 13(16)t	13	16	18	¹	234	26	111	65	98	85	48-300	95	M48-M52	550	8600453
VWBG 14(20)t	14	20	25	¹	271	32	119	70	120	95	52-300	120	M52	750	8600158
VWBG 16(22)t	16	22	28	¹	271	32	119	70	120	95	56-300	120	M56-M60	800	8600454
VWBG 16(25)t	16	25	28	¹	271	32	119	70	120	95	64-300	120	M64-M76	800	8600455
VWBG 31.5(40)t	31.5	40	50	¹	338	46	130	90	170	145	72-300	159	M72-M76	1200	8600456
VWBG 35(48)t	35	48	50	¹	338	46	130	90	170	145	80-300	159	M80-M85	1500	8600457
VWBG 40(50)t	40	50	50	¹	378	46	168	110	170	145	90-300	159	M90-M150	2000	8600458

¹Weight depends on the design.
Subject to technical changes!

VWBG-V/VWBG

UNC Thread

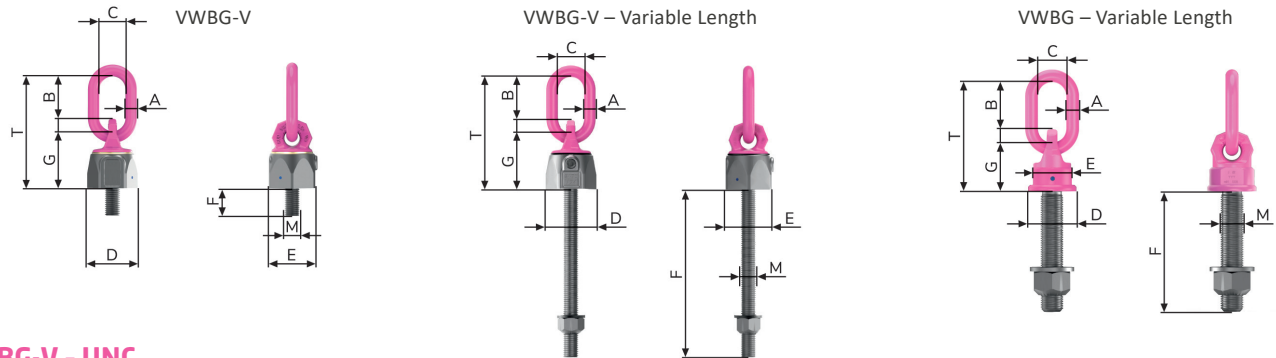

VWBG-V - UNC

Type	WLL-X (t)	WLL-Y (t)	WLL-Z (t)	Weight (kg/unit)	T (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	M	Tightening Torque (Nm)	Model Number	
VWBG-V 0.3-5/16"-18UNC	0.3	0.4	0.6	0.18	76	8	31	29	30	27	13	36	5/16"-18UNC	10	7991090	IN STOCK
VWBG-V 0.45-3/8"-16UNC	0.45	0.6	0.9	0.29	78	8	31	29	33.5	30	17	38	3/8"-16UNC	10	7991091	IN STOCK
VWBG-V 0.6-1/2"-13UNC	0.6	0.75	1.2	0.41	107	10	49	35	42	36	21	47	1/2"-13UNC	10	7991092	IN STOCK
VWBG-V 1.3-5/8"-11UNC	1.3	1.5	2.6	0.52	114	13	46	38	48	41	29	56	5/8"-11UNC	30	7991093	IN STOCK
VWBG-V 2-3/4"-10UNC	2	2.5	4	1.42	137	13	54	35	62	55	28	67	3/4"-10UNC	70	7991094	IN STOCK
VWBG-V 3.5-1"-8UNC	3.5	4	7	2.63	173	18	66	40	81	70	38	88	1"-8UNC	150	7991095	IN STOCK
VWBG-V 5-1-1/4"-7UNC	5	6	10	5.09	221	22	90	50	99	85	47	106	1-1/4"-7UNC	225	7991096	IN STOCK

Subject to technical changes!

VWBG-V - UNC In Variable Length

Type	WLL-X (t)	WLL-Y (t)	WLL-Z (t)	Weight (kg/unit)	T (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F Vario (mm)	G (mm)	M	Tightening Torque (Nm)	Model Number	
VWBG-V 0.45-3/8"-16UNC	0.45	0.6	0.9	¹	78	8	31	29	33.5	30	31-124	38	3/8"-16UNC	10	8600331	
VWBG-V 0.6-1/2"-13UNC	0.6	0.75	1.2	¹	107	10	49	35	42	36	40-149	47	1/2"-13UNC	10	8600332	
VWBG-V 1.3-5/8"-11UNC	1.3	1.5	2.6	¹	114	13	46	38	48	41	49-180	56	5/8"-11UNC	30	8600333	
VWBG-V 2-3/4"-10UNC	2	2.5	4	¹	137	13	54	35	62	55	56-222	67	3/4"-10UNC	70	8600334	IN STOCK
VWBG-V 3.5-1"-8UNC	3.5	4	7	¹	173	18	66	40	81	70	64-246	88	1"-8UNC	150	8600335	IN STOCK
VWBG-V 5-1-1/4"-7UNC	5	6	10	¹	221	22	90	50	99	85	77-331	106	1-1/4"-7UNC	225	8600336	

¹ Weight depends on the design.
Subject to technical changes!

VWBG - UNC In Variable Length

Type	WLL-X (t)	WLL-Y (t)	WLL-Z (t)	T (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F Vario (mm)	G (mm)	M	Tightening Torque (Nm)	Model Number	
VWBG 8(10)t - 1-1/2"-6UNC (F=57)	8	10	15	208	22	86	50	90	80	36-300	94	1-1/2"-6UNC	410	8600451	
VWBG 12(13)t - 1-3/4"-5UNC (F=66)	12	13	17	234	26	111	65	98	85	42-300	95	1-3/4"-5UNC	550	8600452	
VWBG 13(16)t - 2-4.5UNC (F=76)	13	16	18	234	26	111	65	98	85	48-300	95	2"-4.5UNC	550	8600453	IN STOCK
VWBG 16(22)t - 2-1/4"-4.5UNC (F=85)	16	22	28	271	32	119	70	120	95	56-300	120	2-1/4"-4.5UNC	800	8600454	
VWBG 16(22)t - 2-1/2"-4UNC (F=95)	16	22	28	271	32	119	70	120	95	56-300	120	2-1/2"-4UNC	800	8600454	
VWBG 16(25)t - 2-3/4"-4UNC (F=104)	16	25	28	271	32	119	70	120	95	64-300	120	2-3/4"-4UNC	800	8600455	
VWBG 31.5(40)t - 3"-4UNC (F=114)	31.5	40	50	338	46	130	90	170	145	72-300	159	3"-4UNC	1200	8600456	
VWBG 35(48)t - 3-1/2"-4UNC (F=133)	35	48	50	338	46	130	90	170	145	80-300	159	3-1/2"-4UNC	1500	8600457	
VWBG 40(50)t - 4"-4UNC (F=150)	40	50	50	378	46	168	110	170	145	90-300	159	4"-4UNC	2000	8600458	
VWBG 40(50)t - 4-1/2"-4UNC (F=170)	40	50	50	378	46	168	110	170	145	90-300	159	4-1/2"-4UNC	2000	8600458	
VWBG 40(50)t - 5"-4UNC (F=190)	40	50	50	378	46	168	110	170	145	90-300	159	5"-4UNC	2000	8600458	

¹ Weight depends on the design.
Subject to technical changes!