


INOX-Star

Stainless Steel Eye Bolt


Product Features:

- Large WLL range 0.5 t – 2.5 t
- Non-removable special bolt and ring body made of duplex steel 1.4462
- Fast and simple installation
- High resistance in sea water or in environments with high concentration of chlorine ions
- The penta shape clearly distinguishes it from conventional lifting points
- Rotatable through 360°
- Can be loaded from all sides

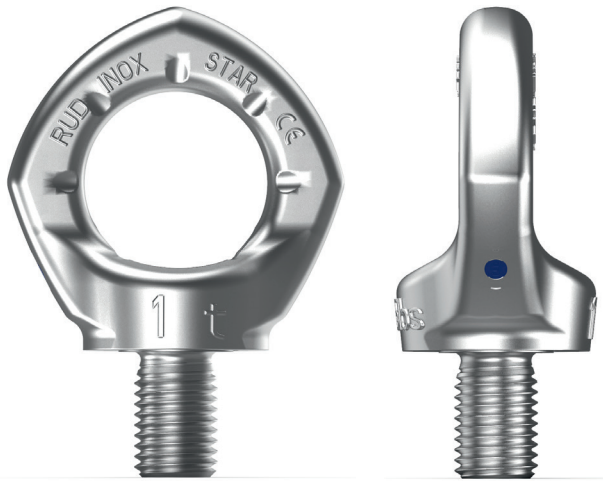



PRODUCT DETAILS

Rotatable through 360°



Clear marking of the minimum WLL

Penta shape

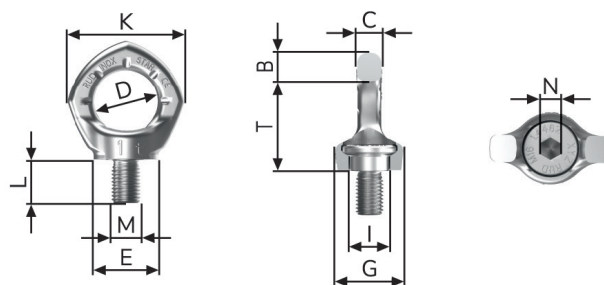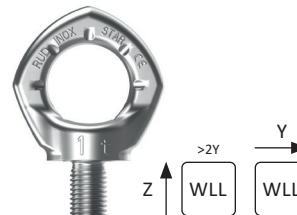

INOX-Star - Metric

Type	WLL (t)	Weight (kg/unit)	T (mm)	B (mm)	C (mm)	D (mm)	E (mm)	G (mm)	I (mm)	K (mm)	L (mm)	M	N (mm)	Tightening Torque (Nm)	Model Number
INOX-Star M12	0.5	0.19	43	14	12	30	30	32	20	56	18	M12	8	25	7993835
INOX-Star M16	1	0.31	50	16	14	35	36	38	22	65	24	M16	10	60	7993836
INOX-Star M20	2	0.53	58	19	16	40	43	47	27.5	74	30	M20	12	115	7993837
INOX-Star M24	2.5	0.92	70	24	19	48	51	56	33	92	36	M24	14	190	7993838
INOX-Star M12 L=50	0.5	0.22	43	14	12	30	30	32	18	56	50	M12	8	25	7997822
INOX-Star M16 L=50	1	0.35	50	16	14	35	36	38	22	65	50	M16	10	60	7910089
INOX-Star M20 L=60	2	0.6	58	19	16	40	43	47	27.5	74	60	M20	12	115	7998714

IN STOCK

IN STOCK

IN STOCK

Subject to technical changes!